

SHALLOW SKIRTED CLOSURES

110-400-7513 S



Specifications:

DIAMETER 110 mm
THREAD PROFILE 400
NECK FINISH 110-400
CLOSURE TOP Stipple
CLOSURE SIDEWALL Fine Ribbed
MATERIAL PP

PACKAGING & FREIGHT INFORMATION

PACK TYPE	PCS/CTN	CTNS/PALT	PCS/PALT	CTN WT*	PALT WT*	FRT CLASS
Stack	315	15	4,725	22 ⁽¹⁾	328 ⁽¹⁾	125 ⁽¹⁾
Stack	315	15	4,725	24 ⁽²⁾	459 ⁽²⁾	125 ⁽²⁾
CARTON DIMENSIONS: 24 x 16 x 15			PALLET DIMENSIONS: 48 x 40 x 50			

(1) Unlined Closures (2) Lined Closures *Approximate

MARKETS

Agricultural, Automotive, Industrial, and Medical Products, Food, Food Service, Personal Care & Cosmetics, Powdered Drinks, Pharmaceuticals, Dressings & Sauces, Peanut Butter & Nuts.

OPTIONS


Available in white, standard, and custom colors.
 Liners can be cut with a tri-tab easy-open feature.
 Can be embossed/debossed with custom message.
 Offset printing is available in up to four colors.

CLOSURE BENEFITS

- A great general-purpose closure
- Fine-ribbed sides are easier to grip
- Our most popular closure style
- Utilized for peanut butter

SHALLOW SKIRTED CLOSURES


110-400-7513 S

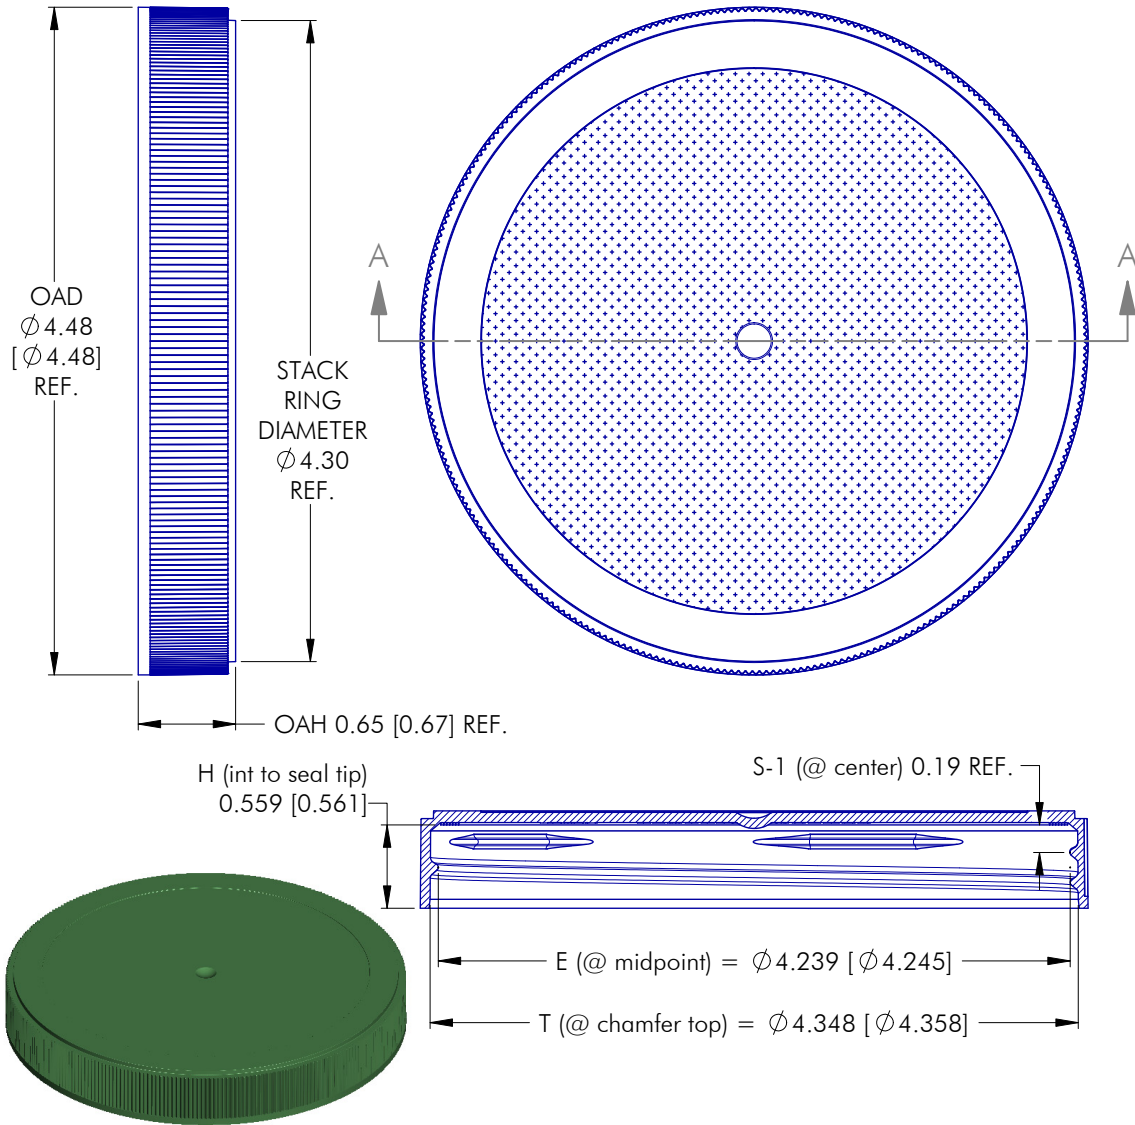

NOTES: (UNLESS OTHERWISE SPECIFIED) 1. ALL DIMENSIONS ARE IN INCHES. 2. SEE CHART FOR DIMENSIONAL TOLERANCE.		4	06.16.15	Update Dimensions	DN
REV	DATE	DESCRIPTION			BY
TOLERANCE	PITCH/TPI	.200 / 5	TURNS	1-1/4	MAT'L PP [HDPE]
.X	±0.1	DRAWN	BEZ	DATE	01.03.98 SCALE 1 : 1 REV
.XX	±0.02	110 - 400 - 7513 S			4
.XXX	±0.010				

SHALLOW SKIRTED CLOSURES

110-400-7513 S

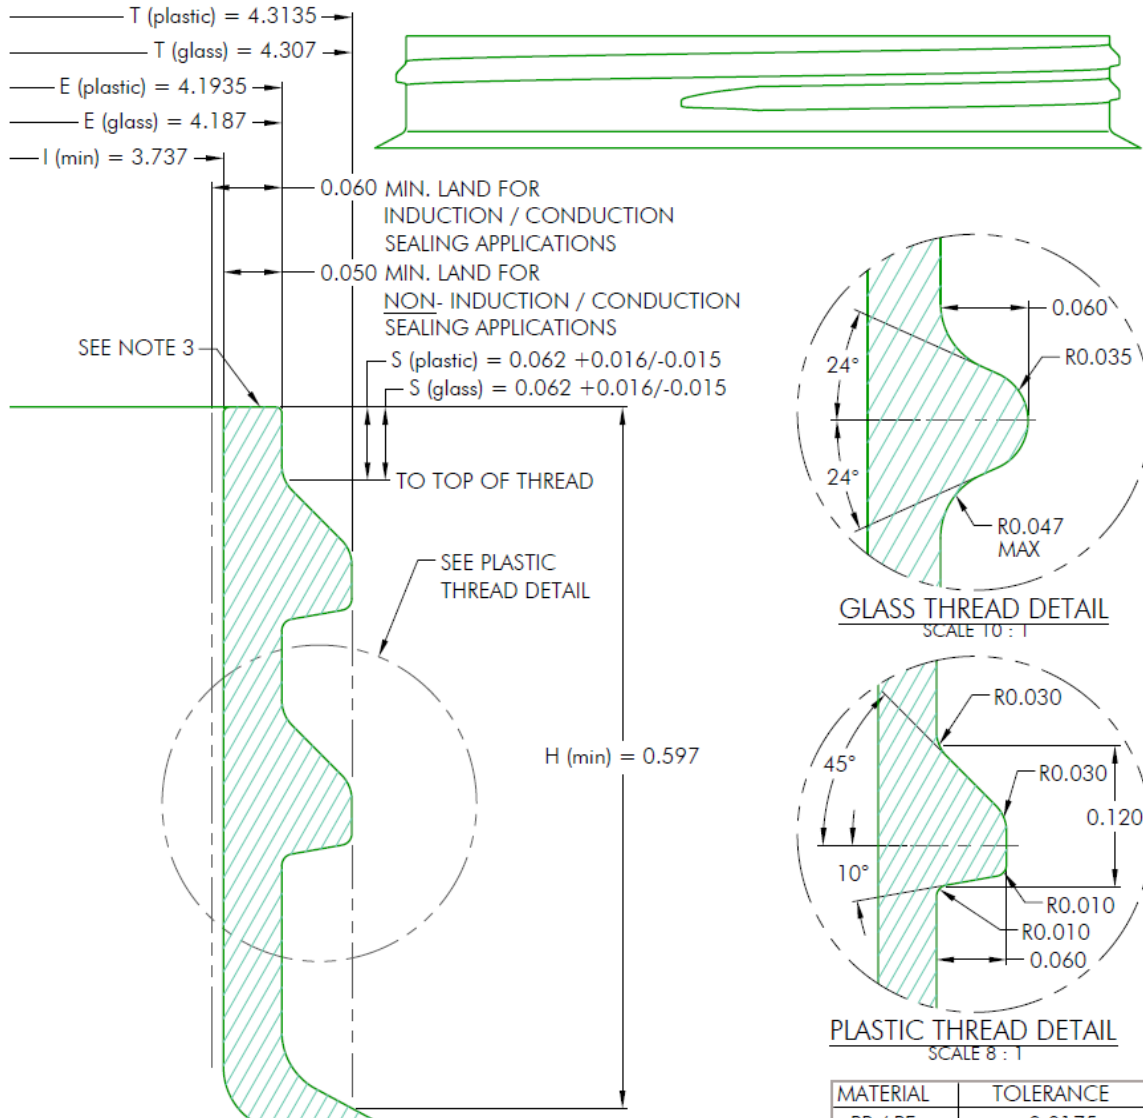

MATERIAL	TOLERANCE
PP / PE	± 0.0175
PET	± 0.012
GLASS	± 0.024

NOTES: (UNLESS OTHERWISE SPECIFIED)		0	11.17.97	Released	BZ
1. ALL DIMENSIONS ARE IN INCHES.		REV	DATE	DESCRIPTION	BY
2. SEE CHART FOR DIMENSIONAL TOLERANCE.		TOLERANCE	PITCH/TPI	200 / 5	TURNS
THIS OR FACSIMILE THEREOF IS THE EXCLUSIVE PROPERTY OF PHOENIX AND MAY NOT BE REPRODUCED WITHOUT THE EXPRESSED WRITTEN CONSENT OF PHOENIX. SOME OR ALL OF THE ITEMS DEPICTED ON THIS DRAWING MAY BE COVERED BY CURRENT PATENTS OR PATENTS APPLIED FOR BY PHOENIX.		.X	±0.1	DRAWN	BEZ
		.XX	±0.02	DATE	11.17.97
		.XXX	±0.010	SCALE	8 : 1
		110 - 400 - FINISH			REV